

GSP45, GSP60 Sub-Prime® Electric Submersible Dewatering Pumps

The line of Godwin Sub-Prime GSP electric submersible pumps is designed for large dewatering applications requiring high head or high volume. The GSP45 and GSP60 models are capable of maximum flow rates from 250 to 550 gpm (15.8 to 34.7 l/sec) and maximum discharge heads from 66 to 150 feet (20.1 to 45.7M). Like the small dewatering and trash handling models in the Sub-Prime line, these large dewatering submersible pumps are suited to tough construction, mining and industrial applications. They feature a slim-line design ideal for fitting into confined spaces and rugged construction for longer life, specifically a cast chromium steel impeller and heavy duty rubber coated adjustable wear parts. Other features and benefits include tandem mechanical seals for dry running and extra protection against leakage, and a dual voltage junction chamber for convenient changeover in the field.



Features

- Convenient top discharge
- Compact slim-line design
- Oversized power cable
- Dual phase junction chamber
- Dual voltage changeover capability
- High performance submersible motor
- Oversized, heavy duty ball bearings
- Tandem mechanical seals – Silicon Carbide on Silicon Carbide primary seal
- Cast Chromium Steel impeller and heavy duty rubber coated adjustable wearparts
- Lightweight and corrosion resistant stainless steel cooling jacket
- Dry running capabilities
- Optional manual and automatic control panels available


Specifications Single-Phase Models

	Model	
	GSP45	GSP60
<i>HP (kW)</i>	4.5 (2.7)	6.0 (4.5)
<i>Max. GPM (l/sec.)</i>		
HV	480 (30.3)	550 (34.7)
HH	N/A	250 (15.8)
<i>Max. Head - Ft. (M)</i>		
HV	66' (20.1M)	75' (23M)
HH		150' (45.7M)
<i>Discharge</i>	4" (100mm)	4" (100mm)
<i>Cable</i>	65' (20M)	65' (20M)
<i>RPM</i>	3400	3400
<i>Max. Temp.</i>	103°F (40°C)	103°F (40°C)
<i>PH Range</i>	5.0-8.0	5.0-8.0
<i>Voltage</i>	230	230
<i>Amps</i>		
HV	20	25
HH		25
<i>Phase</i>	1	1
<i>Weight</i>	94 lbs. 43 kg.	107 lbs. 49 kg.

HV = High Volume
HH = High Head




GSP45, GSP60 Sub-Prime® Performance Curves

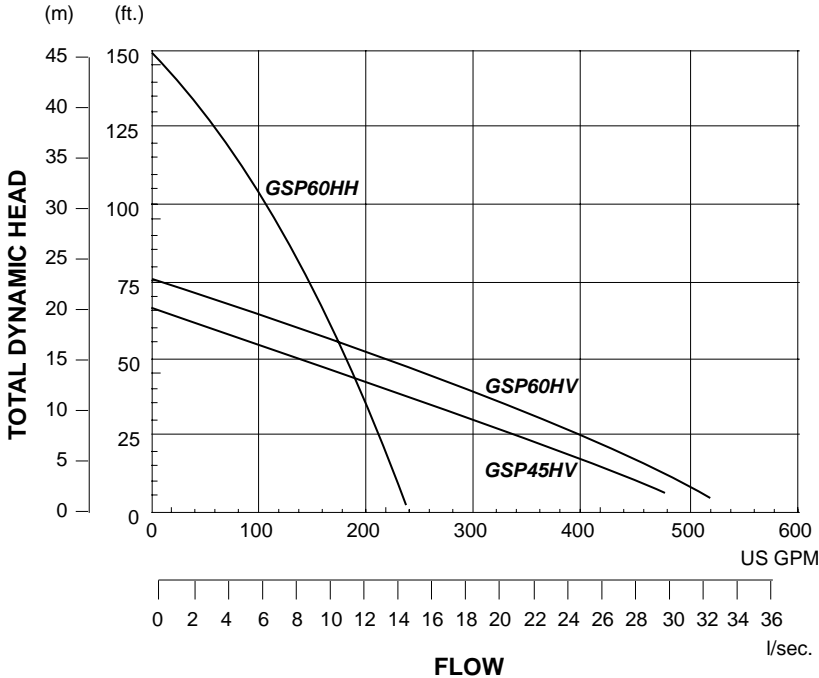


WARNING: Pumps are not designed for use in explosive atmosphere, flammable environments or for pumping volatile liquids.

Design & Construction

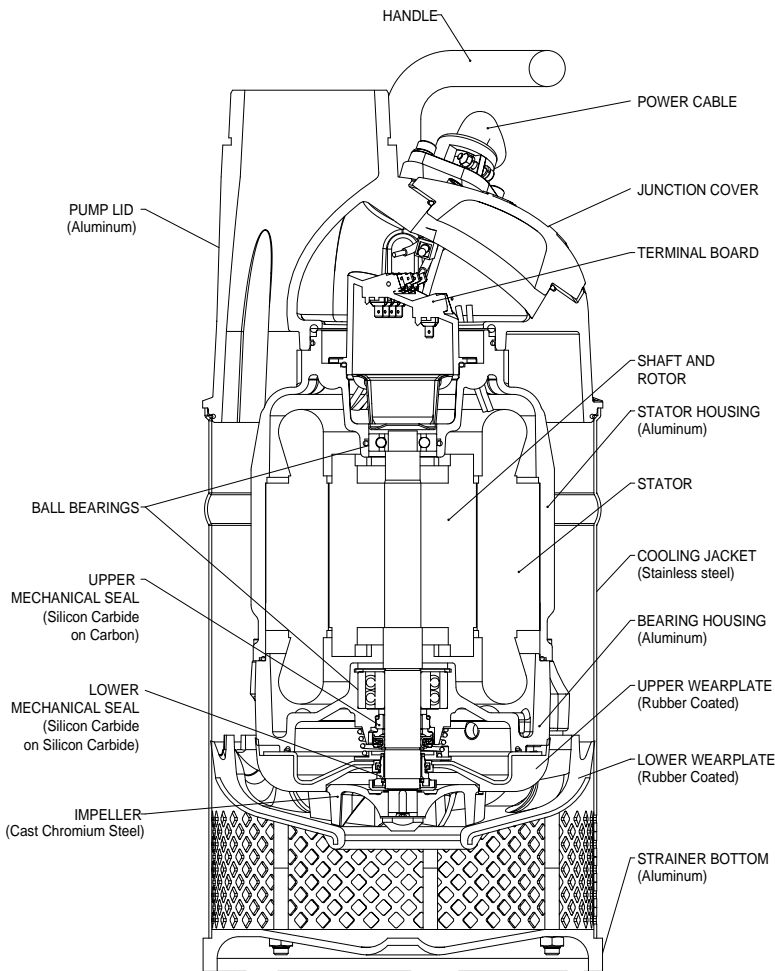

Dimensions

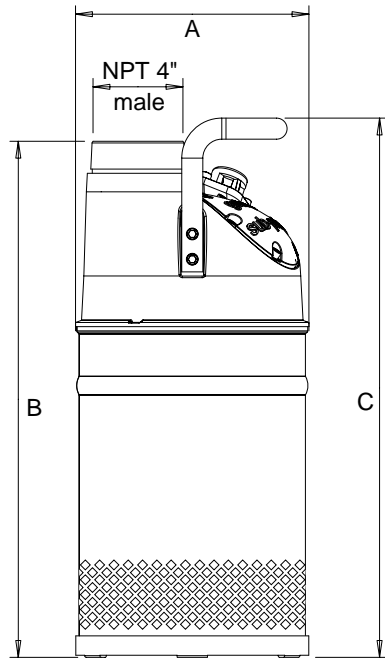

Model	A	B	C
GSP45	10.91" 277mm	24.11" 613mm	25.2" 640mm
GSP60	10.91" 277mm	24.11" 613mm	25.2" 640mm

godwin
pumps

One Floodgate Road, Bridgeport, NJ 08014, USA
(856) 467-3636 • Fax: (856) 467-4841

Quenington, Cirencester, Glos., GL7 5BX, UK
+44 (0)1285-750271 • Fax: +44 (0)1285-750352

E-mail: sales@godwinpumps.com
www.godwinpumps.com

BRANCH LOCATIONS:

Norwich, CT • Buffalo, NY • Chicago, IL
Washington, DC • Richmond, VA
Virginia Beach, VA • Charleston, WV
N. Charleston, SC • Raleigh, NC • Charlotte, NC
Atlanta, GA • Houston, TX • San Antonio, TX
Helena, MT • Los Angeles, CA

Sub-Prime® is a registered trademark of Godwin Pumps of America, Inc. Specifications and illustrations are subject to revision without notice.
© Copyright 2002 Godwin Pumps of America, Inc. All rights reserved.