

GSP800 Sub-Prime® Electric Submersible Dewatering Pumps

The line of Godwin Sub-Prime® GSP electric submersible pumps is designed for large dewatering applications requiring high head or high volume. Specifically, the GSP800 is capable of flow rates to 5,072 gpm (320 l/sec.) and discharge heads to 361 feet (110M). Like the small dewatering and trash handling models in the Sub-Prime line, these large dewatering submersible pumps are suited to tough construction, mining and industrial applications. They feature a slim line design ideal for fitting into confined spaces and rugged construction for longer life, specifically a cast chromium steel impeller and heavy duty polyurethane coated adjustable wear parts. The GSP800 also features tandem mechanical seals for dry running and extra protection against leakage.



Features


- Convenient top discharge
- Compact slim-line design
- Oversized power cable
- High performance submersible motor
- Oversized, heavy duty ball bearings
- Tandem mechanical seals – Tungsten Carbide on Tungsten Carbide primary seal
- Cast Chromium Steel impeller and heavy duty polyurethane coated adjustable wearparts
- Lightweight and corrosion resistant stainless steel cooling jacket
- Dry running capabilities
- Optional manual and automatic control panels available

Specifications Three-Phase Models

Model	HV	HH	SV
<i>HP (kW)</i>	80.0 (59.7)	80.0 (59.7)	80.0 (59.7)
<i>Max. Flow</i>	2,220 gpm 140 l/sec.	1,060 gpm 67 l/sec.	5,072 gpm 320 l/sec.
<i>Max. Head</i>	190' 58M	361' 110M	121' 37M
<i>Discharge</i>	8" (200mm)	6" (150mm)	10" (250mm)
<i>Cable</i>	65' (20M)	65' (20M)	65' (20M)
<i>RPM</i>	1750	3500	1750
<i>Max. Temp.</i>	103°F (40°C)	103°F (40°C)	103°F (40°C)
<i>PH Range</i>	5.0-8.0	5.0-8.0	5.0-8.0
<i>Voltage</i>	460	460	460
<i>Amps</i>	93	93	93
<i>Phase</i>	3	3	3
<i>Weight</i>	1,190 lbs. 540 kg.	1,190 lbs. 540 kg.	1,190 lbs. 540 kg.


HV = High Volume
HH = High Head
SV = Super High Volume

GSP800 Sub-Prime® Performance Curves

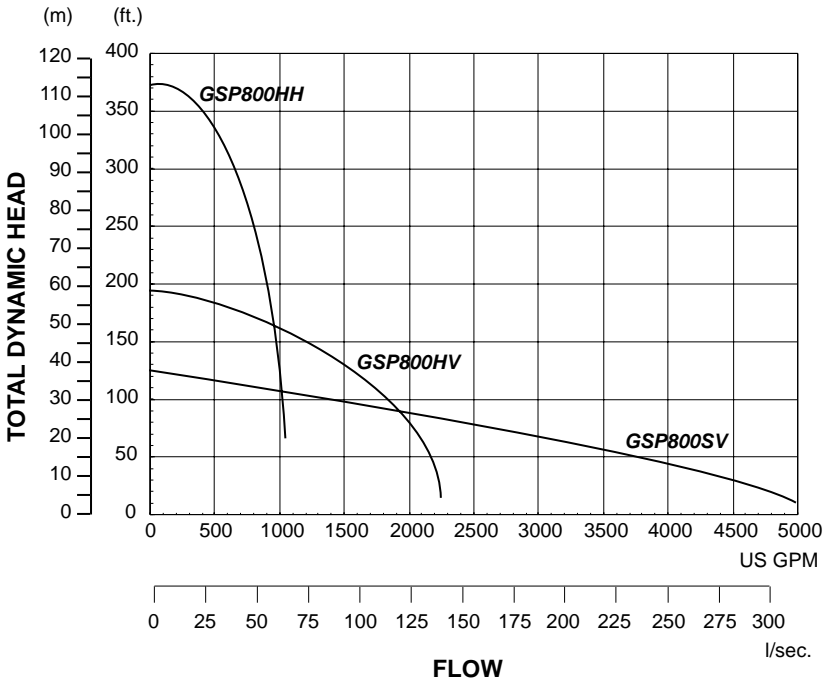


WARNING: Pumps are not designed for use in explosive atmosphere, flammable environments or for pumping volatile liquids.

Design & Construction

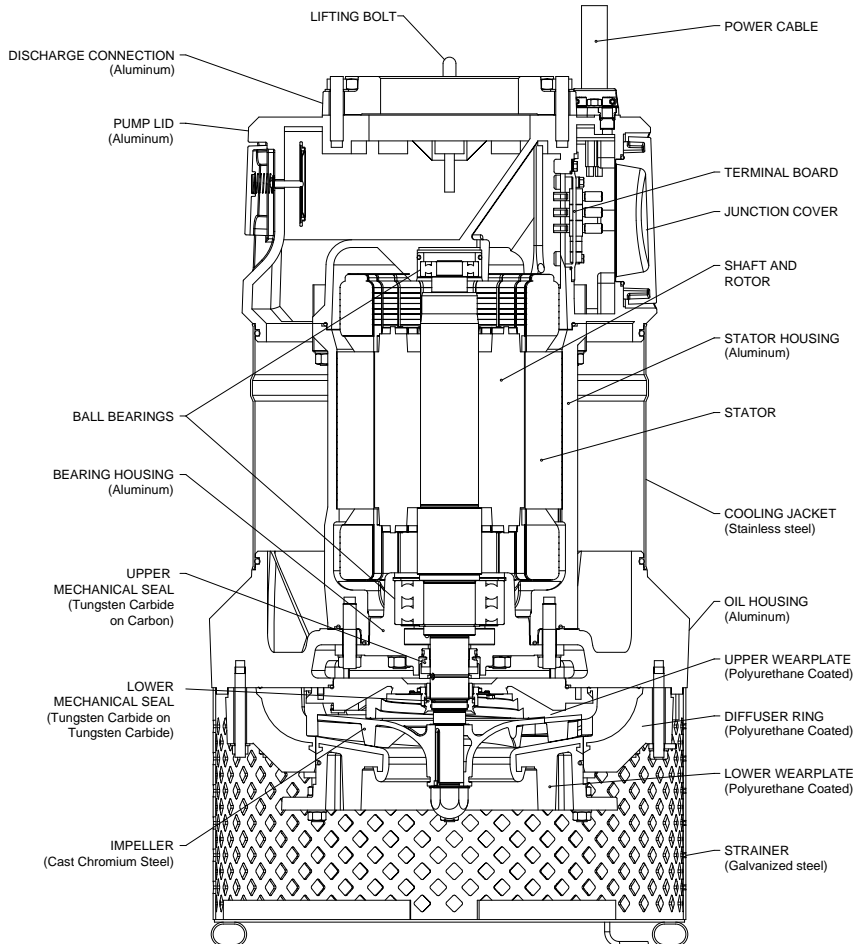

Dimensions

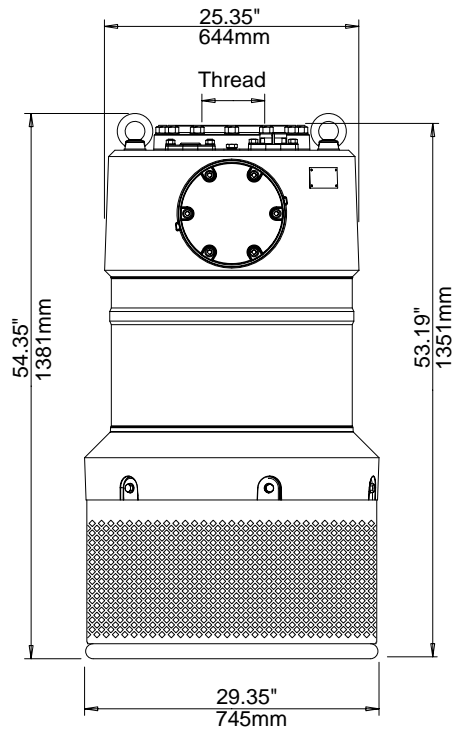

Discharge	HV	HH	SV
Female Thread	8" 200mm	6" 150mm	10" 250mm

godwin
pumps

One Floodgate Road, Bridgeport, NJ 08014, USA
(856) 467-3636 • Fax: (856) 467-4841

Quenington, Cirencester, Glos., GL7 5BX, UK
+44 (0)1285-750271 • Fax: +44 (0)1285-750352

E-mail: sales@godwinpumps.com
www.godwinpumps.com

BRANCH LOCATIONS:

Norwich, CT • Buffalo, NY • Chicago, IL
Washington, DC • Richmond, VA
Virginia Beach, VA • Charleston, WV
N. Charleston, SC • Raleigh, NC • Charlotte, NC
Atlanta, GA • Houston, TX • San Antonio, TX
Helena, MT • Los Angeles, CA

Sub-Prime® is a registered trademark of Godwin Pumps of America, Inc. Specifications and illustrations are subject to revision without notice. © Copyright 2002 Godwin Pumps of America, Inc. All rights reserved.